

Information Sheet

ATTACK ZONE™

Specifications

Black - reactive *Blue Sanded - conventional*

60-102929 *60-102927*

Copper - reactive *Green Pearl - conventional*

60-102930 *60-102928*

Reactive Urethane Conventional urethane

Hook Potential:	10 - 3 (dull/shiny)	10 - 3 (dull/shiny)
Typical Length:	7	8.5
Typical Backend:	8.5	5.5
RG Max:	2.695	2.705
RG Min:	2.674	2.684
Diff. RG:	0.021	0.021
Average RG:	8.4	8.7
Track Flare:	4.5	4.5




Reaction Characteristics

In the all new Attack Zone™ series, Brunswick engineers have combined superior technology, used in our high performance line to produce four mid-price promotional masterpieces that put the finishing touches on the worlds Perfect Line Up of bowlingballs.

The **Attack Zone** series features two balls perfect for medium to dry lane conditions and the entire spectrum of bowler styles.

Notes on Drilling

Note: The top dead center of the piddle weight blocks are marked by a riser pin. All weights of the **Attack Zone** line can be drilled using the techniques developed for two-piece balls. See Brunswick's "Seven Popular Layouts" for detailed drilling information.

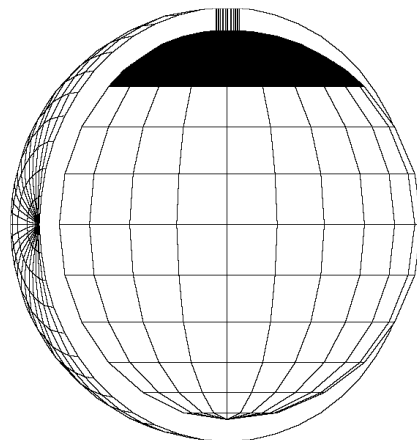


Brunswick®


SEVEN POPULAR LAYOUTS

MAXIMUM
TRACK FLARE
HIGH
REACTIVITY


1-Leverage Pin with 9" hole




2-Leverage Pin-heavy spot toward grip center




3-Leverage Pin with Axis hole




5-Pin between Axis and Leverage




4-Positive label shift



6-Axis Pin with 9" hole



7-Negative label shift



MINIMUM
TRACK FLARE
LOW
REACTIVITY

(P) = Pin

(H) = Heavy Spot

(A) = Axis

(BLH) = Balance hole