

Information Sheet

Control Zone™

Part Number

60-102923

Specifications

NControl Reactive Urethane

Green Pearl Polished finish

Hook Potential: 18.5 - 10.5 (dull/shiny)

Typical Length: 4.5

Typical Backend: 11

RG Maximum: 2.594

RG Minimum: 2.545

RG Differential: 0.049

Average RG: 4.9

Track Flare Potential: 9.3




Reaction Characteristics

The Control Zone's all new *NControl*™ reactive coverstock developed jointly by Brunswick and Bayer is a special formulation designed for the stronger player on broken down lane conditions. For higher rev players, the Control Zone will be cleaner and less sensitive to track breakdown in the front part of the lane and have better backend recovery than PowrKoil 19. The *NControl* coverstock complements PowrKoil 19 by providing the reaction power players need when the lanes breakdown. Players with more normal rev-rates will see a medium hook potential performance that is best suited for medium to dry conditions.

Drilling Information

All weights of the Control Zone™ can be drilled using the techniques developed for two-piece balls. See Brunswick's "Seven Popular Layouts" for detailed drilling information.

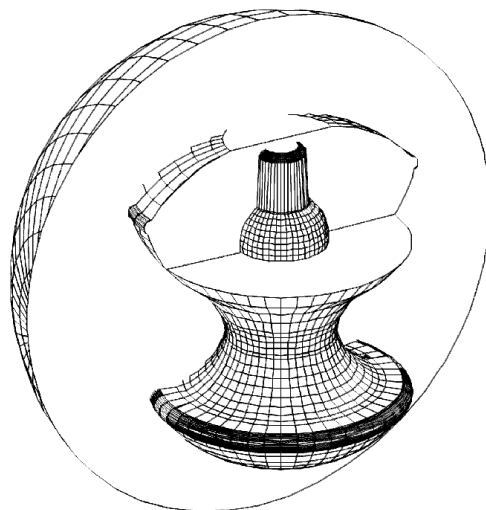


Brunswick®


SEVEN POPULAR LAYOUTS

MAXIMUM
TRACK FLARE
HIGH
REACTIVITY


1-Leverage Pin with 9" hole




2-Leverage Pin-heavy spot toward grip center




3-Leverage Pin with Axis hole




5-Pin between Axis and Leverage




4-Positive label shift



6-Axis Pin with 9" hole



7-Negative label shift



MINIMUM
TRACK FLARE
LOW
REACTIVITY

(P) = Pin

(H) = Heavy Spot

(A) = Axis

(BLH) = Balance hole