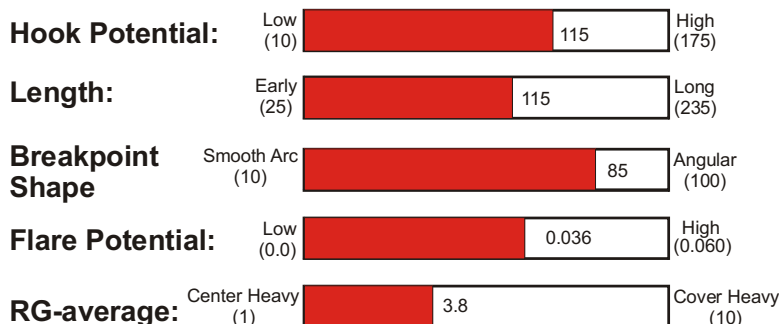
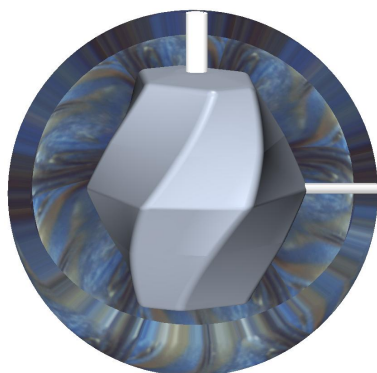


Brunswick® **TWISTED FURY DESTRUCTION**



Part Number

60-104961-93X

Coverstock

XLerator Reactive
2-Color Pearl
Pacific Blue / Chrome
Hardness: 74-75

Factory Finish

Rough Buff

Core Dynamics @ 16#

Two-component
Asymmetrical Core
RG max: 2.548
RG int: 2.525
RG min: 2.512
RG diff: 0.036
RG asym: 0.023
Average RG: 3.8 of 10

Performance

Hook Potential: 115
Length: 115
Typical Breakpoint
Shape: 85
Chart Position: N - 5

Available Weights

12-16 Pounds

XLerated Pin Destructing Power. The **Twisted Fury Destruction** introduces Brunswick's new **XLERATOR** coverstock, combining length you can count on with the back-end reaction you crave to provide pin destructing power.

Coverstock

The new **XLerator** coverstock has been formulated with two main goals in mind. First, to create length through the heads, both when they're fresh and after they've broken down. Second, to create a strong angular move at the breakpoint in order to provide increased pin-carrying ball reaction. The **XLerator** coverstock succeeds at achieving both of these goals, giving you unparalleled reaction with a ball that gets to the spot and returns hard to the pocket.

Core

Good coverstocks become great when paired with a core that accentuates their strengths. After testing a wide range of cores (both new and old designs) with the new **XLerator** coverstock, the core that gave the absolute best reaction was the Torsion Asymmetric Core. This core/coverstock combo makes the **Twisted Fury Destruction** rev up hard and hug the lane without hooking early. The medium RG asymmetric design of the core then turns loose the power of the coverstock on the back-end, unleashing destructive force on the pins.

Reaction Characteristics

Out of the Box: With its Rough Buff finish, the Twisted Fury Destruction will provide excellent length and a strong angular back-end reaction to match up on medium-dry to medium-oily lane conditions for a wide range of bowling styles.

If your Twisted Fury Destruction goes too long: Dull the surface with 800-grit abrasive to get the Twisted Fury Destruction to roll sooner and increase its hooking action.

If your Twisted Fury Destruction hooks too early: Polish your Twisted Fury Destruction with Brunswick's **Factory Finish High Gloss Polish** to get extra length.

For the most up to date Product Line Information go to www.brunswickbowling.com

Maintaining Your Ball Reaction

Brunswick recommends the following procedures to maintain and restore the reaction characteristic of your Brunswick bowling balls:

- Clean your Brunswick ball with **Brunswick Remove All** or similar ball cleaner after every use to reduce oil absorption.
- If you think your Brunswick ball has lost some of its "Out of the Box" reaction, restore the ball to its original factory finish listed on the product information sheet. This is especially important for balls that are highly sanded or polished. Sand to 400-grit then use **Brunswick's Factory Finish High Gloss Polish** to restore the original factory finish on high gloss polish balls. Sand to 220-grit then use **Brunswick's Factory Finish Rough Buff** to restore the original factory finish on rough buff balls. For dull balls, wet sand with the sandpaper listed on the product information sheet.
- If there is a visible track on your ball have your Pro Shop use a Haus or similar resurfacing machine to remove the track then restore the ball to its original factory finish. This service is available, for a fee, at many Pro Shops.
- If your ball has more than 50 games on it, you may be able to increase mid-lane and back-end hooking action by removing oil from the coverstock. Remove the oil from the ball by gently warming it with either the **Revivor** or **Rejuvenator** Pro Shop devices that have been designed for this purpose. The service is available, for a fee, at many Pro Shops. Brunswick testing has shown that by combining the restoration of the factory finish, resurfacing of the track and oil removal, your Brunswick ball can maintain its original "Out of the Box" reaction for hundreds of games.
Do not use a home oven to remove oil. Temperatures cannot be adequately controlled and the ball may crack.
- Absorbent materials sold by other bowling ball manufacturers to remove oil can also be used on Brunswick bowling balls. Information to date seems to indicate that absorbent materials have a more limited ability to remove oil than warming. You may be disappointed with results on heavily oil soaked balls.

Note: Oil soaked balls tend to traction less in the oil and respond less to the dry boards on the lane. If you are matching-up using an oil soaked ball on wet/dry or broken down lane conditions, removing the oil from the ball will significantly change your match-up and possibly create undesirable over reactions.

Ball Comparisons

Want to compare the performance of this ball to other Brunswick balls?

Go to our website at www.brunswickbowling.com. Click on **Balls**, then click on **Pro Shop Information**.

This page contains a link to the **Brunswick Ball Comparison Chart**. This chart allows you to see, at a glance, the performance of all Brunswick balls relative to each other, defined by their **Hook Potential** and **Arc Characteristics**.






There's even an essay to help explain and guide you through the chart.

Lightweight Engineering

At Brunswick, the unique core shape of each individual ball is used for weights from 14 to 16 pounds.

This approach to lightweight ball engineering provides bowlers with consistent ball reaction characteristics across this weight range. At 12 & 13 pounds, Brunswick uses a generic core shape with a RG-differential

That is close enough to the 14-16 pound shape so that the same drilling instructions can be used.

Weight	16#	15#	14#	13#	12#	11#	10#
Core Shape						Not Available	Not Available
RG-max.	2.548	2.561	2.581	2.632	2.655		
RG-Int.	2.525	2.538	2.558	2.621	2.644		
RG-min.	2.512	2.525	2.545	2.589	2.612		
RG-diff.	0.036	0.036	0.036	0.043	0.043		
RG-Asy.	0.023	0.023	0.023	0.011	0.011		