


# Brunswick® *Smash Zone® – Reactive Pearl*

# SMASH ZONE

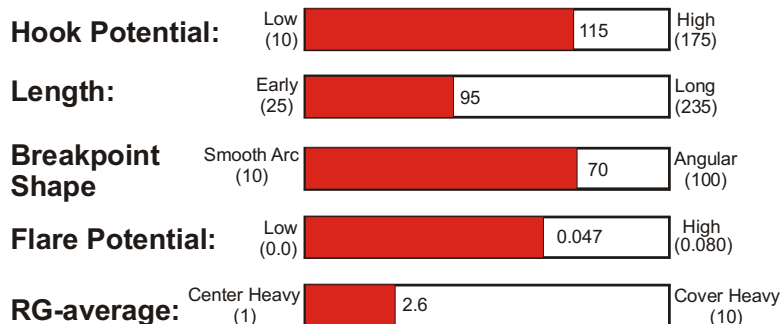

en **MOTION**™  
Coverstock

#### Part Number

60-104914-93X

#### Coverstock

EnMotion Reactive Pearl

Color: Black Pearl

Hardness: 76-77

#### Factory Finish

High Gloss Polish

#### Core Dynamics

RG-max: 2.511

RG-min: 2.464

RG-diff.: 0.047

Average RG: 2.6 of 10

#### Performance

Hook Potential: 115

Length: 95

Typical Breakpoint

Shape: 70

#### Available Weights

12-16 Pounds

### Technology

The Smash Zone integrates a pearlized version of Brunswick's exciting EnMotion™ coverstock with an updated version of the original Inferno™ core and a high gloss polish finish. This combination creates an ultra-low RG symmetric core ball that gets through the front part of the lane then rev's strongly to create excellent mid-lane recovery and a continuous back-end reaction.

The Smash Zone uses a Pearlized version of the EnMotion coverstock. EnMotion combines the best elements from our PowerKoil™, Activator™ and N'Control™ coverstock systems. The Smash Zone unites EnMotion coverstock with an updated version of the original Inferno core that lowers the RGdiff to reduce problems with over flaring. Ultra-low-RG's are known for strong mid-lane recovery moves and their controllable and continuous back-end hooking action, Brunswick has created a strong revving counterpart to the Twisted Fury that will match-up better on lane patterns that create excessive length or over/under reaction problems for higher RG balls.

### Reaction Characteristics

**Out of the Box:** With its High Gloss Polish finish, the Smash Zone is an ideal symmetric core ball for medium-dry to Medium-oily lane conditions.

**If your Smash Zone goes too long:** Dull the surface using 1000-grit or rougher abrasive. The hooking action will increase and its arc will become more even, creating a better match-up for heavily oiled lane conditions and for smoothing over/under reactions seen on wet/dry lane conditions.

**If your Smash Zone hooks too early:** You will need a higher RG ball such as the Swarm or Avalanche Pearl to create more length.

For the most up to date Product Line Information go to [www.brunswickbowling.com](http://www.brunswickbowling.com)

# Brunswick® *Smash Zone – Reactive Pearl*

## **Maintaining Your Ball Reaction**

Brunswick recommends the following procedures to maintain and restore your Brunswick ball's reaction characteristics:

- Clean your Brunswick ball with **Brunswick Remove All** or similar ball cleaner after every use to reduce oil absorption.
- If you think your Brunswick ball has lost some of its "Out of the Box" reaction, restore the ball to its original factory finish listed on the product information sheet. This is especially important for balls that are highly sanded or polished. Sand to 400-grit then use **Brunswick's Factory Finish High Gloss Polish** to restore the original factory finish on high gloss polish balls. Sand to 220-grit then use **Brunswick's Factory Finish Rough Buff** to restore the original factory finish on rough buff balls. For dull balls, wet sand with the sandpaper listed on the product information sheet.
- If there is a visible track on your ball have your Pro shop use a Haus or similar resurfacing machine to remove the track then restore the ball to its original factory finish. This service is available, for a fee, at many Pro Shops.
- If after restoring the original factory finish you feel your Brunswick ball has still lost some of its hooking action, remove the oil from the ball by gently warming it with either the **Revivor** or **Rejuvenator** Pro Shop devices that have been designed for this purpose. This service is available, for a fee, at many Pro Shops. Brunswick's testing has shown that by combining the restoration of the factory finish, resurfacing of the track and oil removal your Brunswick ball can maintain its original "Out of the Box" reaction for hundreds of games.
- Absorbent materials sold by other bowling ball manufactures to remove oil can also be used on Brunswick bowling balls. Information to date seems to indicate that absorbent materials have a more limited ability to remove oil than warming. You may be disappointed with results on heavily oil soaked balls.






**Note:** Oil soaked balls tend to traction less in the oil and respond less to the dry boards on the lane. If you are matching-up using an oil soaked ball on wet/dry or broken down lane conditions, removing the oil from the ball will significantly change your match-up and possibly create undesirable over reactions.

## **Ball Comparisons**

Want to compare the performance of this ball to other Brunswick balls? Go to our website at [www.brunswickbowling.com](http://www.brunswickbowling.com). Click on **Balls**, then click on **Pro Shop Information**. This page contains a link to the **Brunswick Ball Comparison Chart**. This chart allows you to see, at a glance, the performance of all Brunswick balls relative to each other, defined by their **Hook Potential** and **Arc Characteristics**. There's even an essay to help explain and guide you through the chart.

## **Lightweight Engineering**

At Brunswick, the unique core shape of each individual ball is used for weights from 14 to 16 pounds. This approach to lightweight ball engineering provides bowlers with consistent ball reaction characteristics across this weight range. At 12 & 13 pounds, Brunswick uses a generic core shape with a RG-differential of 0.040. This differential is close enough to the 14-16 pound shape so that the same drilling instructions can be used.

Weight	16#	15#	14#	13#	12#	11#	10#
Core Shape						Not Available	Not Available
RG-max.	2.511	2.529	2.548	2.625	2.648		
RG-min.	2.464	2.482	2.503	2.585	2.608		
RG-diff.	0.047	0.047	0.045	0.040	0.040		

For the most up to date Product Line Information go to [www.brunswickbowling.com](http://www.brunswickbowling.com)